148x210mm

MANUAL

Preliminary Steps

1. Read all instructions carefully and study diagrams before installing lights.
2. Check with state and local authorities for laws governing usage and proper mounting of auxiliary lamps.
3. Disconnect ground connection from battery(marked"-")to avoid accidental short circuits before attempting to connet electrical wires.
4. Route new wires along existing wiring.Tape as necessary to correct slack.
5. When running wires,Keep them away from moving parts.

Wiring Instructions

1.Switch Controls:

1) High beam (full power): Red wire connected to positive pole+black wire connected to negative pole.
2) High beam limited power (ECE R149 approved): Red wire and blue wire connected to positive pole + black wire connected to negative pole.
3) White park light: White wire connected to positive pole + black wire connected to negative pole.
   White park light with dynamic start-up: flowing outwords and inwards, then steady burn.
4) Amber park light: Yellow wire connected to positive pole + black wire connected to negative pole.
   Amber park light with dynamic start-up: flowing outwords and inwards, then steady burn.
   When amber and white park light wires are connected to positive at the same time, only amber park light will be on as priority.

Cautions:

.Working voltage (DC12V-24V), Voltage range (DC9V-36V)
.This light becomes hot during continuous use.Don't remove the lamp or touch the casing for at least 30 minutes after turning the lamp off.
.Keep heat-sink clean and exposed to maintain air flow.

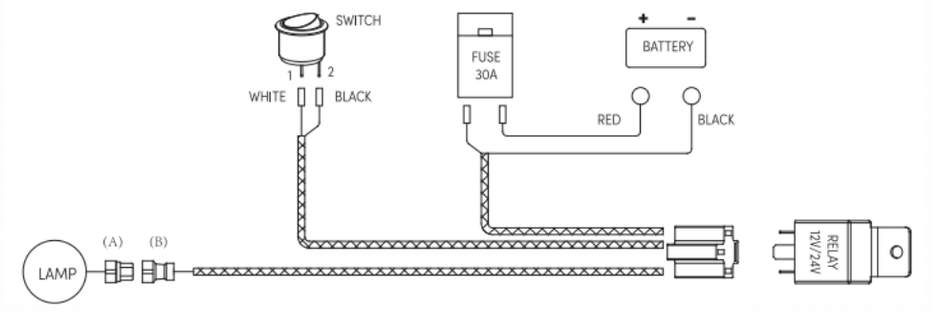

Jungle Pro---SWYG328C SERIES

MANUAL

2. Wire Functions

1) Red Wire: Positive pole for high beam (full power)
2) Black wire: Negative pole
3) Blue wire: Limited power (ECE R149 approved)
4) White wire: Positive pole for white park light
5) Yellow wire: Positive pole for amber park light

Mounting Lights

Lock the light bar end caps with side brackets pack.
Lock the bottom brackets pack to the rear housing of the light bar.
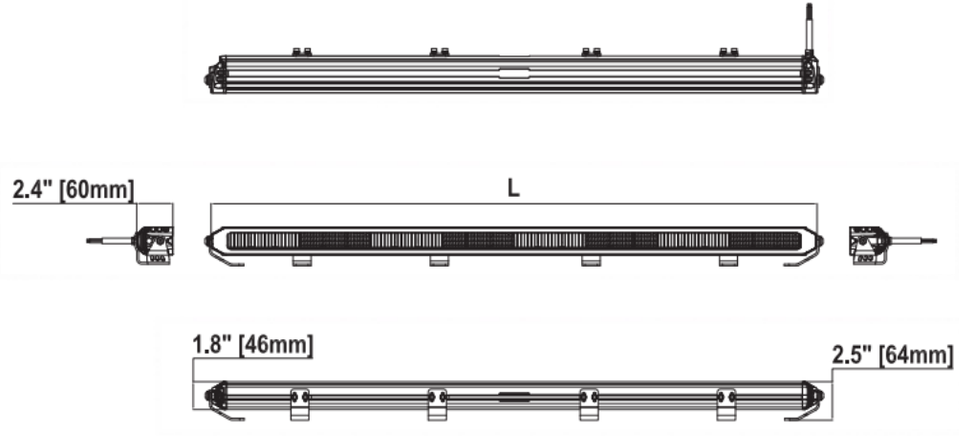
NO.	Model NO.	L
1.	SWYG328C-10	293MM
2.	SWYG328C-20	530MM
3.	SWYG328C-30	768MM
4.	SWYG328C-40	1006MM